


# P600A...P600M

## PLASTIC SILICON RECTIFIERS

### FEATURES

- \* Low forward voltage
- \* High current capability
- \* Low leakage current
- \* High surge capability
- \* Low cost



### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

6.0 Amperes

Dimensions in mm


### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

	P600A	P600B	P600D	P600G	P600J	P600K	P600M	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375". 9.5mm Lead Length at $T_A = 60^\circ\text{C}$	6.0							A
Peak Forward Surge Current 8.3 ms single half sine-wave	350							A
Maximum Forward Voltage at 6.0A Peak	0.95							V
Maximum Reverse Current, Rated DC Blocking Voltage	10							$\mu\text{A}$
Maximum Full Load Reverse Current, Full Cycle Average. .375", (9.5mm) Lead Length at $T_A = 55^\circ\text{C}$	100							$\mu\text{A}$
Typical Junction Capacitance (NOTE 1)	60							pF
Operating and Storage Temperature Range	-65 to + 175							$^\circ\text{C}$

### NOTES:

1 Measured at 1.0 MHz and applied reverse voltage of 4.0  $V_{DC}$ .




**SEMTECH ELECTRONICS LTD.**  
( wholly owned subsidiary of HONEY TECHNOLOGY LTD. )




# P600A...P600M PLASTIC SILICON RECTIFIERS


**Fig. 1 – TYPICAL FORWARD CHARACTERISTICS**

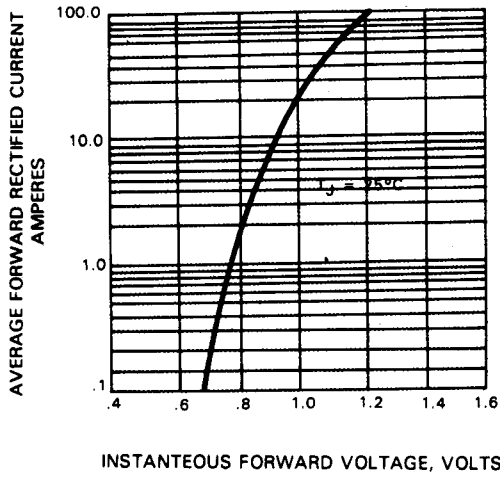



**Fig.2 – PEAK FORWARD SURGE CURRENT**

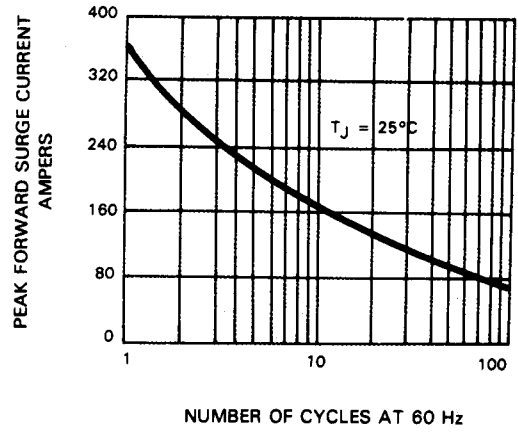

**Fig. 3 – FORWARD CURRENT DERATING CURVE**

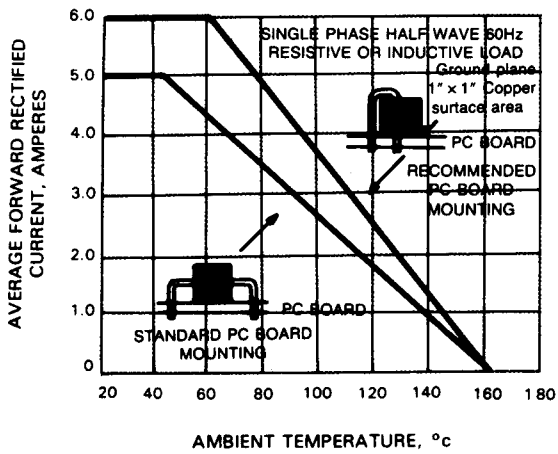

**Fig. 4 – TYPICAL JUNCTION CAPACITANCE**

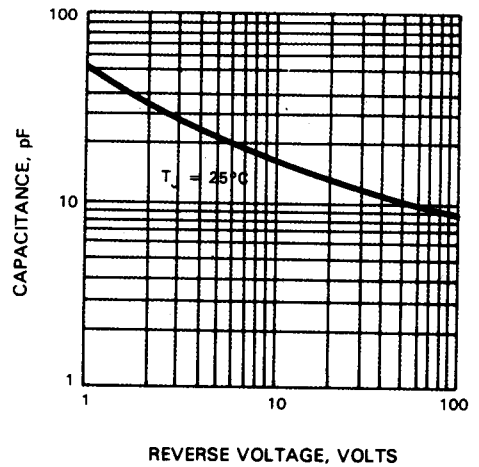

**SEMTECH ELECTRONICS LTD.**

( wholly owned subsidiary of HONEY TECHNOLOGY LTD. )



This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.